

Table of Contents

1. Description.....	2
2. Features.....	3
3. Block Diagram and Charging Mode	4
3.1 Detail Function Description	4
4. MA5889 Pin Assignment	6
4.1 MA5889 Charging Modes:	6
5. Electrical Characteristics	7
5.1 Absolute Maximum Rating.....	7
5.2 General Characteristics	7
5.3 Electrical Characteristics	7
6. Package	8
6.1 SOT23-6.....	8
7. Schematic.....	9

1. Description

With Smartphone and Tab become the mainstream portable mobile devices, the demand for a “universal charging (fast charging)” to various mobile devices increase dramatically.


The MA5889 is a USB fast-charging controller which complies with USB Battery Charging Specification (BC) version 1.2, which allows charging device to draw a current similar to using the original wall-charger. Normally, a USB wall-charger provides unified charging mechanism by traditional USB current supply (0.5A) when charging devices through USB ports. With a USB enabled wall-charger which complies with USB BC, it provides unified charging mechanism by more USB current supply (up to 1.5A) when charging devices through USB ports, so called “fast-charging” mechanism. In another word, MA5889 is a high performance solution for “fast-charging” mechanism and speed up charging time much.

MA5889 embedded automatic charger detection circuit which complies with USB Battery Charging Specification (BC) version 1.2, and Apple/Samsung Tab resistor mode. This feature implies MA5889 supports wide range of Smartphone/Tabs for fast charging and provides design flexibility for system manufactures.


The MA5889 is designed for all charger products with USB interface, which provides the package of SOT23-6 for dual USB port support.

2. Features

- Support USB Battery Charging Specification 1.2 (BC1.2 Charging Spec)
- Support Apple® Devices fast charging. (Selectable Apple® 1A / 2.4A mode)
- Support Samsung Galaxy Tab Devices Charging (2.1A mode)
- Support Chinese Telecommunications Industry Standard YD/T 1591-2009
- Automatic charging detection circuit for Apple, Samsung, and BC compliant devices
- Ultra low power consumption
- MCU base design for fast technical support
- Available in SOT23-5 package for MA5887 (single USB port)
- Available in SOT23-6 package for MA5889 (dual USB port)
- Target application:
 - ✓ USB universal wall-charger
 - ✓ USB universal car-charger
 - ✓ Travel adapter
 - ✓ Power bank supply

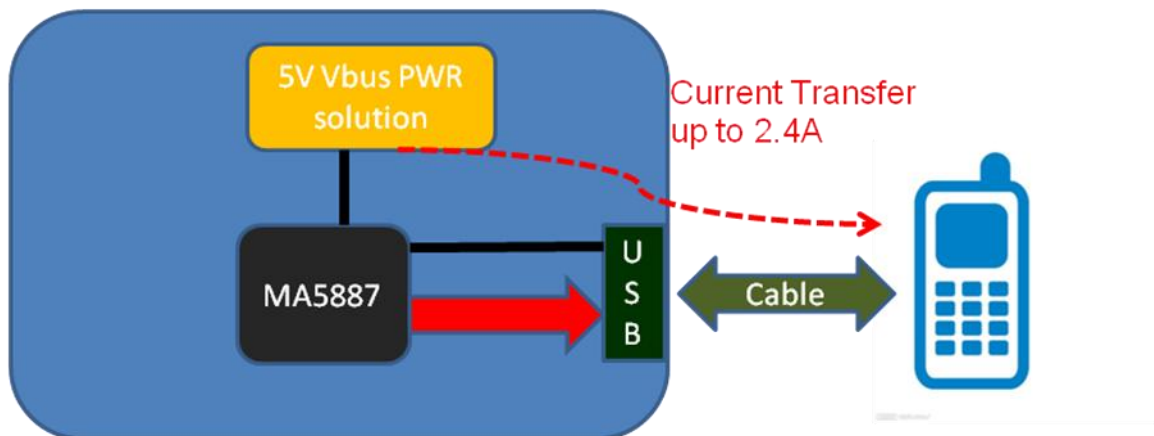


3. Block Diagram and Charging Mode

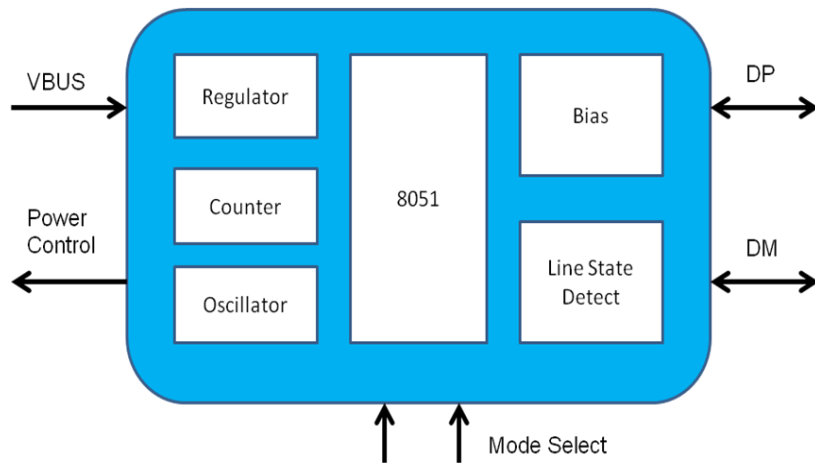


Block Diagram of MA5889

3.1 Detail Function Description

- Smartphone/Tab will monitor Timing/voltage/Current of D+/D- signal to determine which kind of charging port it connected to.
- The impedances presented on D+ and D- of “dedicated chargers” is different depending on the “specific standard” the dedicated charger is designed to. Standards such as BS1.2, Divider mode and Quick Charge 2.0.
 - ✓ BC1.2 and the Chinese Telecommunications Industry Standard YD/T 1591-2009 define that the D+ and D- data lines should be shorted together with a maximum series impedance of 200 Ω.
 - ✓ Apple divider mode, 2 V and 2.7 V are presented on D+ and on D-.

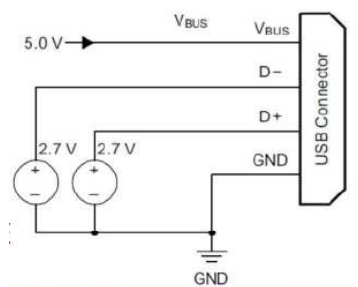

Apple 2.4A divider mode



BC1.2 DCP mode

- Apple divider mode, Samsung Galaxy mode and BC1.2 define the protocol necessary to allow “portable devices” to recognize what kind of port it is connected to, so that it can start its maximum allowable current draw.
- Current dedicated charger limitation :
 - ✓ Apple iPad USB charger cannot charge Galaxy Tab


Product Data Sheet

MA5889 (USB Fast Charging Controller)



- ✓ Samsung Galaxy Tab USB charger cannot charge iPhone/iPad
- ✓ Traditional USB wall adaptor (BC1.2, DCP, with DP/DM short) cannot charge iPhone/iPad/Galaxy tab
- If using MA5889 in an USB charger, after protocol handshaking between MA5889 and the charging device (Smartphone/Tab) through DP/DM signals, MA5889 will auto-configure the dedicated DP/DM voltage bios for the connecting charging devices.

4. MA5889 Pin Assignment

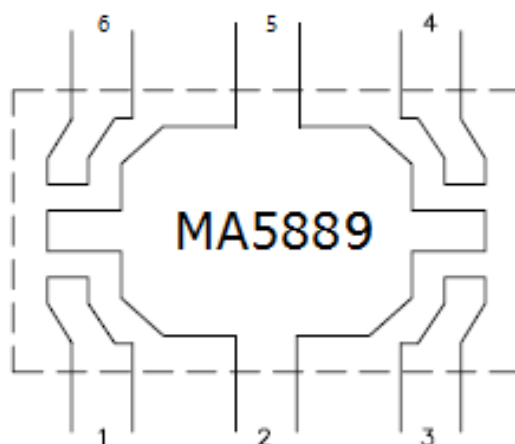

Pin #	Pin Name	I/O	Description
1	DP2	B	D+ to USB connector 2
2	GND	P	Ground
3	DP1	B	D+ to USB connector 1
4	DM1	B	D- to USB connector 1
5	VDD5	P	Power
6	DM2	B	D- to USB connector 2

I/O Type Definition

O : Output

I : Input

B : Bi-directional

P : Power

4.1 MA5889 Charging Modes:

Charging Mode	Max charging current	Support Device Type
BC1.2 (DCP only)	1.5A	BC 1.2 device
Apple Resistor	2.4A (Default)	iPad Series (up to iPad Air)
Samsung Divider	2.1A	Galaxy Tab

5. Electrical Characteristics

5.1 Absolute Maximum Rating

Parameter Description	Min	Typ	Max	Unit
Junction Temperature Range	-10		85	°C
Storage Temperature Range	-40		125	°C
ESD MM (Machine Mode)		±650		V
ESD HBM (Human Body Mode)		±8		kV

5.2 General Characteristics


Parameter	Description	Min	Typ	Max	Unit
Vcc	Supply Input Voltage Range	4.5	5	5.5	V
Vih	Input High Voltage	4		5.5	V
Vil	Input Low Voltage	0		1	V
Ivcc	Current Consumption		250		uA

5.3 Electrical Characteristics

Parameter	Description	Min	Typ	Max	Unit
Rbc	DP/DM Short Resistance in DCP Mode		80		Ω
Vdp_a24	DP Voltage in Apple 2.4A Mode		2.7		V
Vdm_a24	DM Voltage in Apple 2.4A Mode		2.7		V
Vs_g	DP/DM Voltage in Samsung Galaxy Mode		1.2		V

6. Package

6.1 SOT23-6

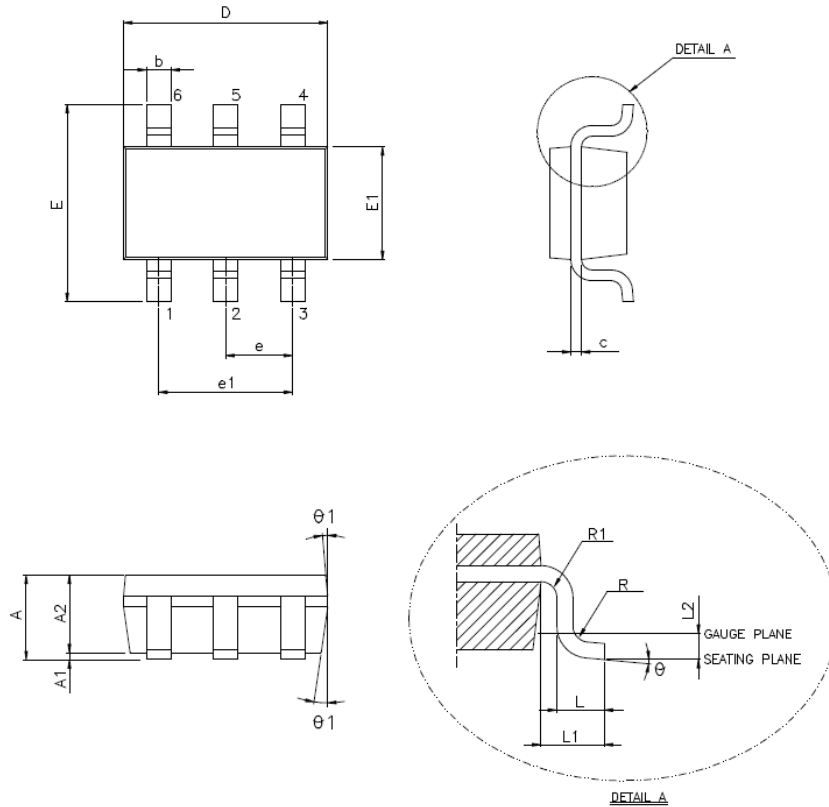








VARIATION(ALL DIMENSIONS SHOWN IN MM)

SYMBOL	MIN.	NOM.	MAX.
A	—	—	1.45
A1	0.00	—	0.15
A2	0.90	1.15	1.30
b	0.30	—	0.50
c	0.08	—	0.22
D	2.90 BSC.		
E	2.80 BSC.		
E1	1.60 BSC.		
e	0.95 BSC.		
e1	1.90 BSC.		
L	0.30	0.45	0.60
L1	0.60 REF.		
L2	0.25 BSC.		
R	0.10	—	—
R1	0.10	—	0.25
θ	0°	4°	8°
θ1	5°	10°	15°

NOTE :

1. JEDEC OUTLINE : MO-178 AB.

7. Schematic

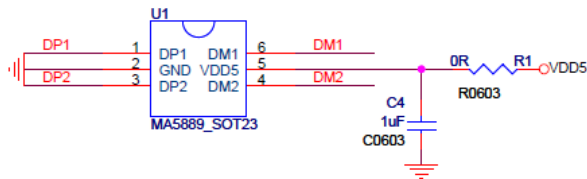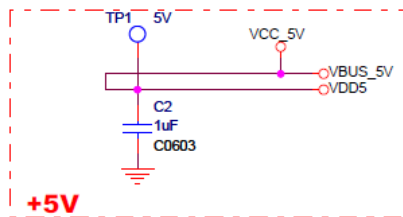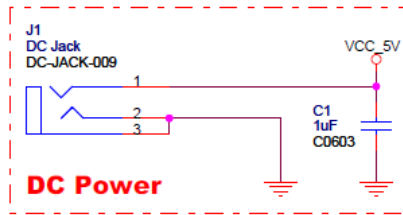

Disclaimer

All the information in this document is subject to change without prior notice. Prolific Technology Inc. does not make any representations or any warranties (implied or otherwise) regarding the accuracy and completeness of this document and shall in no event be liable for any loss of profit or any other commercial damage, including but not limited to special, incidental, consequential, or other damages.

Trademarks

The Prolific logo is a registered trademark of Prolific Technology Inc. All brand names and product names used in this document are trademarks or registered trademarks of their respective holders.

Copyrights

Copyright © 2014 Prolific Technology Inc. All rights reserved.

No part of this document may be reproduced or transmitted in any form by any means without the express written permission of Prolific Technology Inc.